

BELMONDO®-rubber flooring for horses

Product overview



Improved safety and comfort for your horse


Up to 28 % less work


Research has found that soft rubber mat systems with reduced bedding (approx. 1 cm) save time when mucking out. The rubber mat provides softness and insulation, the bedding is only needed to absorb moisture.



Lying down with confidence

In the study, horses spent slightly straw pellets than on straw alone. Very soon after the installation of BELMONDO® Trend, they adopted their preferred lying position (lying down with confidence).



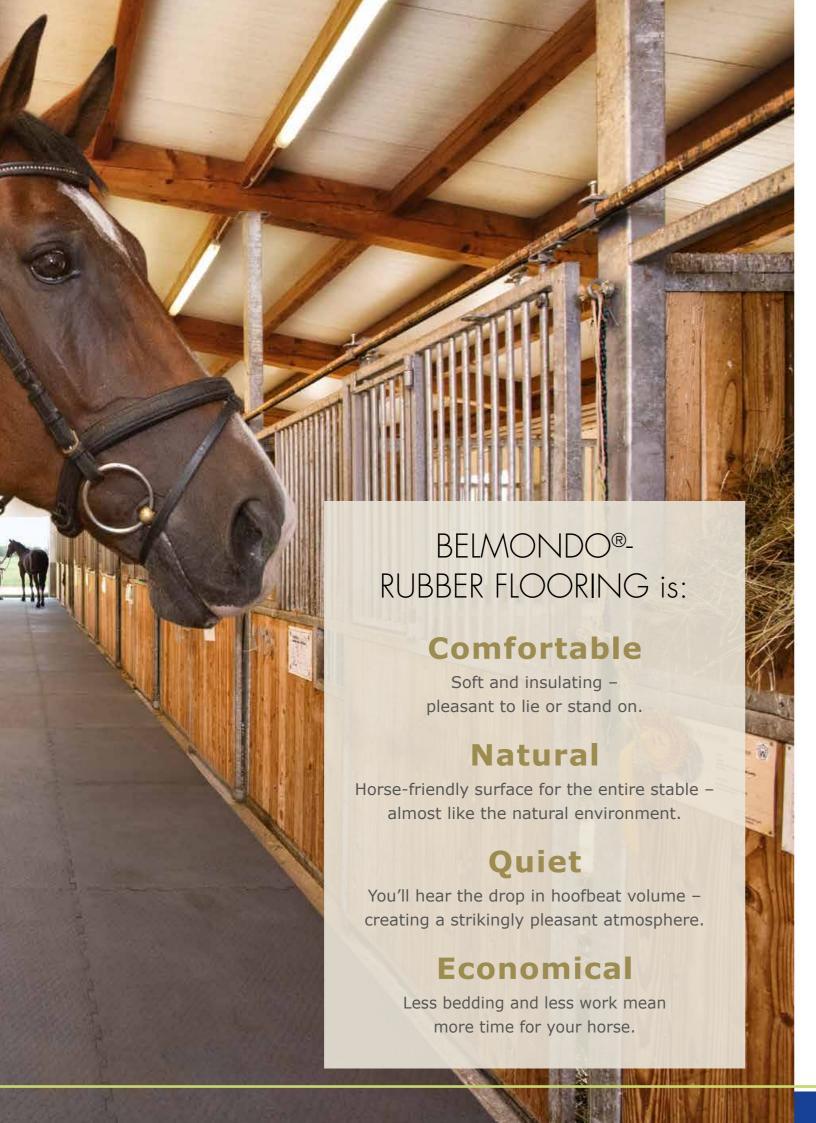

Rubber is what makes us special!



Sustainability

Our raw materials are top quality used tyres which have already taken care of your safety on the roads. Every year, we recycle the rubber from around 8 million used tyres, thus reducing environmental pollution. The rubber used in tyres is very high quality and is the ideal basis for durable, stable and flexible mats.



Expertise

The unique KRAIBURG mixing process creates a high quality rubber compound that retains the key properties of the tyres (stable structure, elasticity, abrasion resistance).



Innovation

We have our own laboratory to continuously monitor the properties of our products. We also have external testing carried out by the DLG to validate our own tests. Many products are also certified by the "Fachstelle für tiergerechte Tierhaltung und Tierschutz" (Specialist Unit for Animal-Friendly Husbandry and Animal Welfare) for use in Austria (www.tierschutzkonform.at).



Transparency

We are inspected by the DLG to check our continuous product and production quality, based on the worldwide ISO 9001 standard. Every year, we open our doors to comprehensive quality audits of our manufacturing processes. As part of these audits, we passed PAH certification.







Made in Germany

We have been developing and manufacturing rubber flooring for animal husbandry at our Tittmoning site for more than 50 years. With more than 200 employees, we are one of the leading suppliers of stable flooring. KRAIBURG BELMONDO® rubber equestrian flooring is a quality product, made in Germany. As a German manufacturer, we guarantee many years of reliable use from our products and take pride in the excellent reviews we receive from consumer and testing institutions.



Tolerances: thickness: +3/-2 mm; length + width: +/-1.5 % (DIN ISO 3302-1 tolerance class M4) The tolerances also apply within the mat and when installed.

The products presented here should only be used for the mentioned applications. Technical specifications are subject to alterations. All sales are subject to our General Terms and Conditions. Legal basis is the German version of the document.

BELMONDO® is a trademark of



Gummiwerk KRAIBURG Elastik GmbH & Co. KG Göllstraße 8, 84529 Tittmoning GERMANY

Tel: +49/86 83/701-527

E-mail: belmondo@kraiburg-elastik.de Internet: www.kraiburg-belmondo.com 01/2019



BELMONDO® interlocking on 4 sides

for loosebox / bedding area **BELMONDO**® **BELMONDO**® **BELMONDO**® Basic Classic **Trend** Tried and tested -Basic loosebox with air cushioning highly rugged ▶ high comfort, whether ▶ reinforced surface standing or lying down Surface: horseshoe profile Surface: horseshoe profile Surface: horseshoe profile with top coat with top coat Lower side: grooves Lower side: grooves Lower side: air cushioning with rubber ridges Thickness: 18 mm 18 mm 28 mm **Dimension:** $1 \text{ m} \times 1 \text{ m}$

for the stable walkway	for indoor stable walkway & washdown	
BELMONDO® Walkway	BELMONDO® Walkpro	BELMONDO® Style
FOKUS TEST 06/14 Säurebeständigkeit	GUMMNYERK KRABIURG ELASTIK BELMONDO WALKPRO Rutschfestigkeit DLG-Prüfbericht 6420	GUMMMWERK KRABBURG ELASTIK BELWONDO'S TYLE Rutschfestigkeit DLG-Prüfbericht 6885
Light weight	Attractive and functional design	Proven benefits in four natural colours
▶ low mat thickness	▶ improved grip when wet	• each mat has a uniq marbling effect*
Surface: horseshoe profile Lower side: grooves	Surface: mosaic design with top coat Lower side: grooves	Surface: checked design Lower side: grooves
	Thickness:	
12 mm	16 mm	16 mm
Dimension: 1 m x 1 m		Dimension: 114 cm x 171 cm

^{*}Slight deviations in colour are possible due to differences in material.

Please take notice: BELMONDO® Style cannot be joined with other BELMONDO® products!

for stable paddock / walkways / washdown BELMONDO® Paddock





The allrounder - also for outdoor areas

UV-resistant and weather proof





Surface: rhombic profile with top coat

Lower side: knobs (5 mm)

Thickness:

24 mm

Dimension: 1 m x 1 m

accessories





BELMONDO® Drain gutter / Gully

For BELMONDO® Walkpro, Paddock, Style

Dimensions: Drain gutter:

16.7 cm x 100 cm Style: 16.7 cm x 114 cm

Gully:

40 cm x 40 cm

VITA Top



Optical border towards the wall

Dimensions: Height: 5 cm Width x length: 5.5 cm x 200 cm



Driving over: BELMONDO® mats (except Kingsize Duo, Walkway, Kingsize) are basically suitable for vehicle traffic. Please comply with our guidelines for trafficability!



All products are suitable for every type of shoe.



BELMONDO® tailor-made

for the horse walker BELMONDO® **BELMONDO**[®] Motion Horsewalker The Classic – with reinforced surface Basic comfort in the horse walker especially for intensively used horse walkers Surface: mosaic design Surface: rhombic profile with top coat Lower side: multisquare profile (3 mm) Lower side: multisquare profile (3 mm) **Thickness:** 21 mm **Dimension:** individually tailor-made

If you have any questions regarding the electric conductivity, we are happy to be at your disposal.

BELMONDO® jointless

for loosebox / bedding area	for bedding areas	for aneasthesia / recovery pen		
BELMONDO® Kingsize Cover	BELMONDO® Kingsize Duo	BELMONDO® Kingsize		
FDKUS TEST 06/14 Säurebeständigkeit	FOKUS TEST 06/14 Säurebeständigkeit	FOKUS TEST 08/14 Dimplungswirkung, Sierebestlandigkeit, Rutschlestigkeit		
Large-area flooring for the loosebox insulating and improved grip	The extra soft one • especially for bedding areas (e.g. in the open stable)	Especially for animal clinics • for aneasthesia / recovery pen		
Surface and lower side: pebbled profile	Surface and lower side: pebbled profile 5.5 cm 10 cm	Surface and lower side: pebbled profile		
Thickness:				
15 mm	40 mm	65 mm		
Dimensions: Width x length: 262/348/440/525 cm x 250 cm - 600 cm in 10 cm increments	Dimensions complete system: Width x length: unlimited (from 525 cm x 600 cm: mat joint)	Dimensions complete system: Width x length: max. 525 cm x 600 cm		

BELMONDO® special applications

for the wall	for natural soil	for sloping walkways / ramps	
BELMONDO® Rodeo	BELMONDO® Flix	BELMONDO® Step	
FOKUS TEST 06/14 Saurebeständigkeit			
"Shock absorber" on the wall • protects your horse's legs and the loosebox walls	The simple soil stabilisation • especially for areas that tend to get muddy	For sloping walkways • practically tested on slopes of up to 15 %	
Surface: wooden planks look Lower side: grooves	Surface: grip profile Lower side: knobs (5 mm)	Surface: rib profile with top coat Lower side: grooves	
Thickness:			
12 mm	24 mm	24 mm	
Dimension: 130 cm x 350 cm	Dimension: 110 cm x 175 cm Hole size: Ø approx. 30 mm	Dimensions: Width x length: 65/130 cm x 200 cm	
		16 mm 24 mm	

Please take notice of the corresponding specifications and installation instructions with useful advice and tips. You will obtain these at your local BELMONDO® dealer or at www.kraiburg-belmondo.com.

